

## BNC SERIES 10 STRAIGHT ADAPTERS





Fig. 1

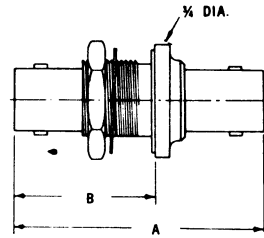


Fig. 2

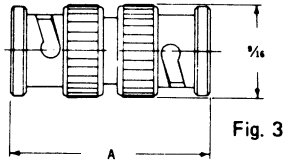


Fig. 3





Fig. 4

DELTA PART NO.	FIG.	DIELECTRIC	DIMENSIONS		MAX. PANEL	MTG. FIG.	REMARKS
			A	B			
UG-414A/U	1	Teflon	1-9/32	11/16	—	07	
UG-491B/U	3	Teflon	1-7/32	—	—	—	
UG-492D/U	2	Teflon	1-17/32	7/8	1/4	59	Hermetically Sealed
UG-914/U	4	Teflon	1-9/32	—	—	—	


SEE LAST PAGE FOR MOUNTING DIMENSIONS.

### RIGHT ANGLE ADAPTERS

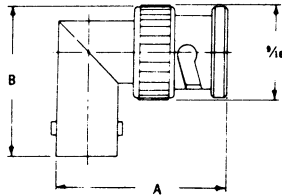

DELTA PART NO.	DIELECTRIC	DIMENSIONS		TYPE	REMARKS
		A	B		
UG-306B/U	Teflon	1-1/16	7/8	M-F	
1029-000-A002	Teflon	1-1/16	7/8	M-F	Polarized


### TEE ADAPTERS

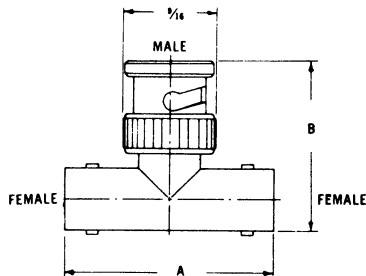

DELTA PART NO.	DIELECTRIC	DIMENSIONS		TYPE	REMARKS
		A	B		
UG-274C/U	Teflon	1-9/32	1-1/32	F-M-F	
1030-000-A002	Teflon	1-9/32	1-3/64	F-M-F	Polarized
1050-000-A000	Teflon	1-13/16	1-5/32	M-M-M	
1049-000-A000	Teflon	1-37/64	59/64	F-F-M	
1038-000-A000	Teflon	1-9/32	53/64	F-F-F	

# BNC SERIES 10

## RESISTIVE TERMINATIONS

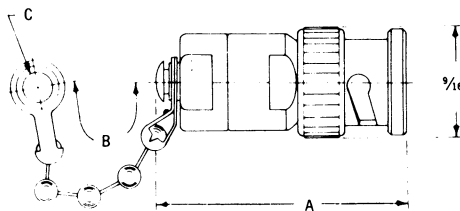

DELTA PART NO.	DIELECTRIC	DIMENSIONS			REMARKS
		A	B	C	
MX-554/U*	Rexolite	1-1/4	3-1/2	.144	1/2 Watt, ±5% Resistor
MX-554A/U*	Teflon	1-9/32	3-1/2	.144	
1031-000-A00A*	Rexolite	1-1/8	—	—	1/2 Watt, ±5% Resistor
1051-000-A00A*	Rexolite	1-25/64	—	—	
1051-000-A000*	Rexolite	1-1/2	4-1/2	.130	1 Watt, ±5% Resistor

\* If not specified, a 51 ohm resistor will be supplied.

## DUST CAPS

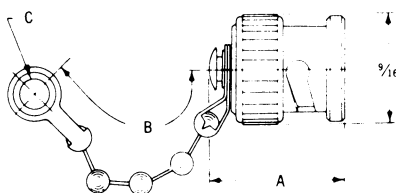


Fig. 1


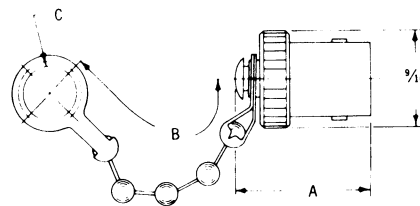


Fig. 2

DELTA PART NO.	FIG.	DIMENSIONS			REMARKS
		A	B	C	
CW-123A/U	1	23/32	2-1/4	.144	Shorting Type
CW-155A/U	1	19/32	—	—	
CW-159/U	1	11/16	2-1/4	.144	
CW-282/U	2	11/16	3-1/4	.281	Shorting Type
1033-000-A00C	2	11/16	2-1/2	.144	

## STRIP-TRANSMISSION LINE ADAPTERS

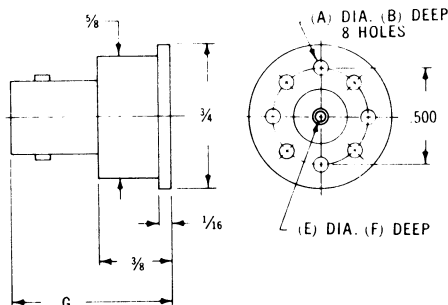

DELTA PART NO.	DIELECTRIC	DIMENSIONS				
		A	B	E	F	G
1056-000-A000	Teflon	.078	5/16	.063	7/32	53/64
1056-000-A000-2	Teflon	#2-56	1/4	#1-72	3/16	53/64